

IP BULLET CAMERA, 2MP WITH POE



FEATURES

- 2 MP resolution with CMOS sensor
- H.264/MJPEG
- Double stream, IR illumination up to 30 meters
- 2,8 ~ 12 mm varifocal lens
- BLC, real WDR, 3D-DNR
- Privacy mask, ROI
- Tripwire and intrusion detection
- IP67
- PoE supported
- Plug&Play connection with NEXTGEN NVR
- Compatible with DDNS DEMES

SOFTWARE AND APPS


- HYUVMS and HYUCONNECT for Android and iOS
- HYU VMS client software
- Cloud P2P service: hyucloud.hyundai-security.es



ACCESSORIES

HYU-200
Tube baseHYU-214
Pole mount

DIMENSIONS

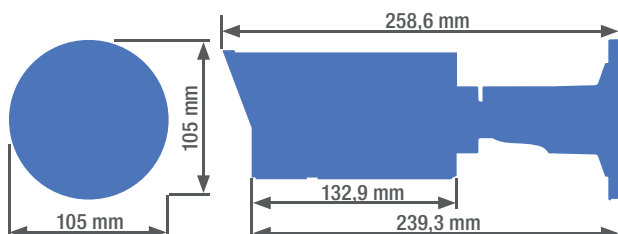

CAMERA

Image sensor	1/3" CMOS 2 MP
Effective pixels	1920(H) x 1080(V)
Resolution	Stream 1 1080P, 1,3MP, 720P (25/30 fps)
Stream 2	704x576, 640x480, 352x288, 320x240 (25/30 fps)
Electronic shutter	1/3s ~ 1/10.000s
IR illumination	20 ~ 30 meters
Minimum illumination	0,01 lux F1.2 (AGC On) / 0,014 lux F1.4 (AGC On) / 0 lux IR ON

LENS

Lens	2,8 ~ 12 mm
Viewing angle	113° ~ 33,8°

FUNCTIONS

Day/night	Removable mechanical filter (automatic switch)
OSD menu	Supported
Backlight compensation	BLC, Digital WDR
Noise reduction	3D-DNR
ROI	Supported
Privacy mask	Supported

INTELLIGENT ANALYSIS

Intelligent detection	Tripwire detection, intrusion detection, motion detection, dynamic analysis
-----------------------	---

AUXILIARY INTERFACE

Memory card slot	MicroSD/SDHC/SDXC card slot (up to 128 GB)
------------------	--

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±10%)
Consumption	Max. 7,1W
PoE	Supported
Working temperature	-30°C ~ +60°C
RH	≤95% (without condensation)
Protection	IP67

PHYSICAL FEATURES

Case	PVC & metal
Dimensions	95 x 105 x 258,6 mm
Weight	1200 g